

## Features

- 24/48 channels of control
- 48 Submasters
- 24 Auxiliary Buttons
- Playback stack
- Patching to 512 DMX channels
- DMX in allowing snap shots of all 512 DMX channels
- Monitor Display
- USB storage
- MIDI Notes
- Online Help
- Lock function



## Overview

The Jester is a new lighting console from Zero 88. It offers direct fader control of up to 48 channels of DMX either using submasters or a traditional theatre playback stack.

Up to 24 auxiliary buttons are provided which can be used to trigger DMX devices such as scrollers, smoke machines or strobes this allows for many more channels to be controlled.

A monitor port is standard on the Jester. Channel, cuestack and submaster data can all be viewed using the monitor. An onboard LCD screen also provides the user with all information needed to operate the console allowing it to be used without a monitor.

A USB port allows users to back-up shows that have been recorded on the Jester.

A DMX-in port allows the Jester to be used as an economical back-up console for other desks. It is possible to snapshot a full 512 channels of DMX into submasters or the memory stack.

The Jester has three modes, allowing it to operate as simple two scene preset desk through to a fully functional memory console. A wide mode feature allows 48 channel operation, with an internal scene store for 2-preset operation. In Run mode the user has full access to all the fader channels on the console. This allows live changes to be made to specials instantly.

MIDI notes can be used to trigger channels or submasters. A sound to light jack allows for chases to be sequenced to music. A remote input jack allows any button on the front panel to be pressed from a remote control. Chases can be recorded into the memory stack or directly into submasters.

The Jester provides users with a powerful set of programming and playback tools in an easy to use and economical lighting console.

## Ordering Information


Jester 12/24 - Desk mount: 00-108-00  
 Jester 12/24 - 19" Rack mount:  
 00-128-00  
 Jester 24/48: 00-109-00

## Supplied Accessories

Power Supply  
 Operating Manual (on CD)

## Specifications

- Control Channels: Up to 512
- Channel Faders: 48
- Preset Master Faders: 2
- Fade Time Controls: 1 (Split Up/Down times can be programmed)
- Sequence Speed Control: 1
- Sequence Master Fader: 1
- Grand Master Fader: 1
- Blackout Button: 1
- Flash Buttons: 48
- Power Supply: External 100-240 Volts 50/60Hz
- DMX Output: 1 Universe
- DMX Input: 1 Universe
- DMX to USITT DMX-512 1990 Protocol
- Dimensions: 88mm(H) x 711mm(W) x 279mm(D)
- Weight: 6.5Kg (14.3lb)
- Operating environment: +5°C to +40°C
- Humidity: 5% to 95% Non condensing

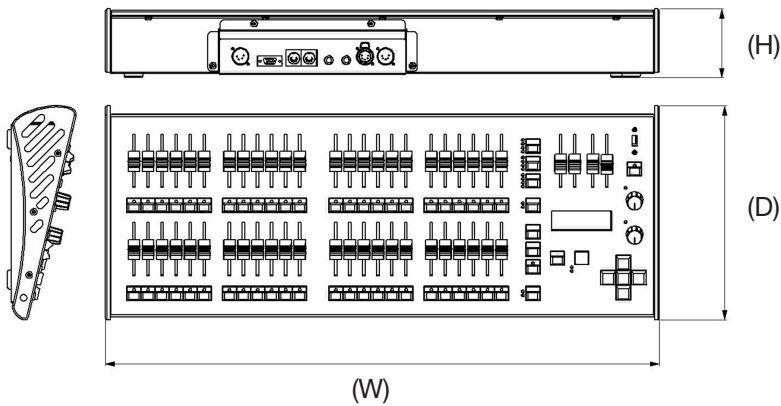

88mm(H) x 711mm(W) x 279mm(D)

<b>Voltage</b>	100V <input checked="" type="checkbox"/>	220 - 240V NON CE <input checked="" type="checkbox"/>	<b>Standards</b> 
	110 - 127V <input checked="" type="checkbox"/>	277V <input type="checkbox"/>	
	230V CE <input checked="" type="checkbox"/>	347V <input type="checkbox"/>	

This product conforms to one or more of the above standards.  
 Please contact your local Cooper Controls representative for further information.

### Zero 88

Cooper Controls Ltd, Usk House, Lakeside Close,  
 Llantarnam Park, Cwmbran, NP44 3HD, UK.  
 Tel : +44 (0) 1633 838088 Fax : +44 (0) 1633 867880  
 E-mail : enquiries@zero88.com web : www.zero88.com