
Firma: Player Plus doo
Adresa: Svetogorska 9
Telefon: +381 11 3347 442
Fax: +381 11 3347 615
PIB: 106966344
E-mail: porudzbine@player.rs

Mogami 2791 Microphone cable Black

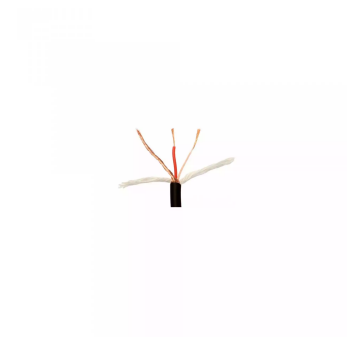

Šifra: 14393
Kategorija prozivoda: Na Metar Mikrofonski
Proizvođač: Mogami

Cena: 660,00 rsd

Part No. W2549

High Quality Balanced Microphone Cable

Part No.	W2549
Conductor Size (mm²)	0.339mm² (#22AWG)
O.D. (mm)	6.0ø (0.236")
Flex Life	14,500 cycles
Tensile Strength	657 N
Colors	Black / Red / Yellow / Green / Blue

105 Strand Broadcast Mic. Cable

Excellent for rugged remote and on stage use in Sound Reinforcement, TV, Radio broadcasting etc. Its compact size together with a heavy duty binder and filler system and a braided shield make it ideal for all continuous handling applications. Exhibits very low microphonic pick - up and can operate at very cold temperatures down to -20#176;C (-4#176;F) without losing its flexibility. 105 strands of 44AWG annealed bare copper features ultra flexibility with extraordinary flex life, while maintaining excellent strength

characteristics.

Part No. W2791

105 Strand Broadcast Mic. Cable

Image not found or type unknown

Part No.	W2791
Conductor Size (mm²)	0.206mm² (#24AWG)
O.D. (mm)	5.5ø (0.217")
Flex Life	131,000 cycles
Tensile Strength	578 N
Colors	Black / Red / Yellow / Green / Blue
Braided Shield	Coverage: over 95%

SPECIFICATIONS

Configuration			Diagram w2549d Image not found or type unknown		Diagram w2791d Image not found or type unknown	
Part No.			W2549		W2791	
No. of Conductor			2			
Conductor		Details		30/0.12 OFC		105/0.05 A
Size(mm²)		0.339mm² (#22 AWG)		0.206mm² (#24 AWG)		
Insulation		Ov. Dia.(mm)		1.9Ø (0.075")		1.5Ø (0.059")
	Material		XLPE (Cross-Linked Polyethylene)			

Colors		Blue / Clear		Red / Clear			
Shield			Served Approx. 64/0.18A		Braid 0.10A/9/16		
Jacket	Ov. Dia.(mm)		6.0Ø (0.236")		5.5Ø (0.217")		
	Material		Flexible PVC		Flexible PVC		
Colors		Black / Red / Yellow / Green / Blue		Black / Red / Yellow / Green / Blue			
Roll Sizes			50m (164 Ft) 100m (328Ft) 200m (656Ft)		50m (164 Ft) 100m (328Ft) 200m (656Ft)		
Weight per 200m Roll			11kg		9kg		

ELECTRICAL & MECHANICAL CHARACTERISTICS

Part No.		W2549		W2791	
DC Resistance at 20°C	Inner Cond.		0.058Ω/m(0.018Ω/Ft)		0.09Ω/
Shield	0.013Ω/m(0.004Ω/Ft)		0.002Ω/m(0.006Ω/Ft)		
Capacitance at 1kHz, 20°C (Partial C. Value) See below figure*	K_0		76pF/m(23pF/Ft)		86pF/m
K_1	11pF/m(3.4pF/Ft)		10pF/m(3.1pF/Ft)		
Inductance between conductors at 1kHz. 20°C		0.8µH/m(0.24µH/Ft)		0.8µH/m(0.24µH/Ft)	

Electrostatic Noise**	50mV Max.	250mV Max.
Electromagnetic Noise**	0.15mV Max.	0.15mV Max.
Microphonics at 50KΩ Load**	30m V Max.	30m V Max.
Voltage Breakdown	Must withstand at DC 125V/15sec.	
Insulation Resistance	100000 M Ω × m Min. at DC 125V, 20°C	
Flex Life**	14,500 cycles	164,000 cycles
Tensile Strength	657N	578N
Emigration	Non-emigrant to ABS	Non-emigrant to ABS
Applicable Temperature	-20°C¯ +70°C(-4°F¯ +158°F)	

** Using standard testing methods of Mogami Wire & Cable Corp.

* Partial Capacitance

patial capacitance diagram

Cene su informativnog karaktera. Prodavac ne odgovara za tačnost cena iskazanih na sajtu, zadržava pravo izmena cena. Ponudu za ostale artikle, informacije o stanju lagera i aktuelnim cenama možete dobiti na upit. Plaćanje se isključivo vrši virmanski - bezgotovinski.