

SVS RCA Subwoofer Kabl 3M

Šifra: 14434

Kategorija proizvoda: Hi-Fi Analogni kablovi

Proizvođač: SVS

Cena: 5.400,00 rsd




SVS SoundPath RCA Cables are Durable, Truthful, and Affordable

SVS SoundPath Interconnect Cables have a substantial feel thanks to their uncompromised design and build quality. They feature pure copper conductors, 24K gold plated brass connectors and a precision-engineered five-layer dielectric insulation system to reject all RF and electromagnetic interference. The cables offer ultra-high bandwidth and ultra-low capacitance for exceptional performance under any conditions and truthful rendering of audio signals, all for a value only SVS can offer.

SVS SoundPath Interconnect Cables are available in convenient lengths ranging from one to 15 meters. The cables are ideal for connecting and getting the best performance possible from your subwoofer, but also any component in your system.

Uncompromised Design and Build Quality

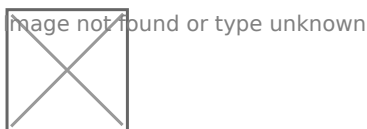

Cable - Materials of Construction:

All new premium cotton braided jacket - attractive, durable, dielectric insulation system

High density 7.0mm PVC outside core dielectric - part of five

1.6mm HDPE inside core dielectric - part of five-layer insulated conductor

PET Mylar shield layer - part of five-layer insulated system, s

Directional shield layer is a spiral braid of premium grade Aluminum foil and 56 strands of 99.99% OFC tinned copper Shielding – critical part of five-layer insulation system. Soldered to ground terminal at the source side helps reduce EMI and RF noise between electronics.

Total five-layer isolation system rejects electromagnetic (EM) and radio frequency (RF) interference.

The Dual balanced conductors are made from 14 strands of 99.99% OFC stranded copper conductors, and individually isolated in independent HDPE dielectric jackets - allow consistent signal flow, high signal purity, and minimize signal loss.

Nominal Cable Diameter: 7mm

RCA Connector - Materials Of Construction:

Precision soldered with high grade lead-free solder for consistent signal flow.

24K gold plated brass conductor pin – effective

24K gold plated brass split grounding body – tight grounding.

Electrical Properties:

Conductor DCR = 77 mΩ/meter

Shield DCR: 30 mΩ/meter

Nominal Impedance: 110Ω. Cable and RCA connectors are impedance-matched. Standing Wave Ratio (VSWR) and Return Loss.