

PR LIGHTING XR 200 BEAM - Roto glava

Šifra: 08989
Kategorija proizvoda: Roto Glave
Proizvođač: PR LIGHTING



Cena: 179.880,00 rsd

XR 200 BEAM

PR-2203

XR 200 BEAM equipped with Platinum 5R lamp, moving beam light with an unprecedented brightness usually achievable only with far greater wattages. Weighing just 16 kg, produces a perfectly parallel, laser-like beam with an incredible output of 67,765 lx at 20m. With its light weight and modest footprint, XR 200 BEAM is small enough to be fitted anywhere - on trusses at live and TV events, on stage, in showrooms or conference rooms.

Key Features:

PHILIPS MSD Platinum 5R (8,000K) (189W)

1 color wheel with 14 dichroic color filters

1 fixed gobo wheel with 17 interchangeable gobos + white

Beam Angle 0°-4° linearly adjustable

DMX 0-100% linearly adjustable focus

Double shutter blades, 0.3~20 F.P.S

1 Prism/Frost Wheel with 1 x CTO, 1 x frost, and 1 x 8-facet prism + white

Channels: Short Mode: 10, Standard Mode: 14

Pan 540°, Tilt 270° with auto position correction, speed adjustable, with lock mechanism.

Weight: 16Kg

IP20

Fixture usage time and software version display

Modular construction for easy maintenance

Standard Accessories:

G clamps, 2 pcs; XLR connectors, 1 set

Image: [Lighting Fixture Type Unknown](#)

Safety cord, 2 pc;

Optional Accessories: Ω clamps, 2 pcs

Technical Data:

Power Supply: 100V/200V/220V/230V/240V AC□50/60Hz

Power Consumption: 280W@220V

Light Source:

PHILIPS MSD Platinum 5R
(8,000K, 2,000hrs)

Colors:

1 Color Wheel

14 dichroic colour filters plus white
variable speed and bi-directional rainbow effect
linear colour changing is available

Gobos:

1 Fixed gobo wheel :

17 interchangeable gobos+ white
Shaking and bi-directional wheel scrolling at variable speeds
Gobo changing is available

Prism/Frost Wheel

8-facet rotating Prism(bi-directional with variable speeds)+CTO filter+ Frost Filter + White

Focusing

0-100% linearly adjustable by Dmx

Strobe:

Double shutter blades, 0.3~20 F.P.S

Head Movement:

Pan 540°, Tilt 270° with auto position correction

Beam Angle

0°□4°, Linear zoom

Control:

DMX512, 3 pin and 5 pin interfaces
10 channels in short mode, 14channels in standard mode
Self-test mode

Other Functions:

Adjustable Pan & Tilt speed
Fixture and lamp usage time display
Modular construction for easy maintenance
DMX512 wireless receiver (optional)
DMX512 wireless transmitter (optional)

Housing:

Composite plastic, IP20

Weight: 16Kg

Sizes: please see the drawings below

Light Output:

Image not found or type unknown

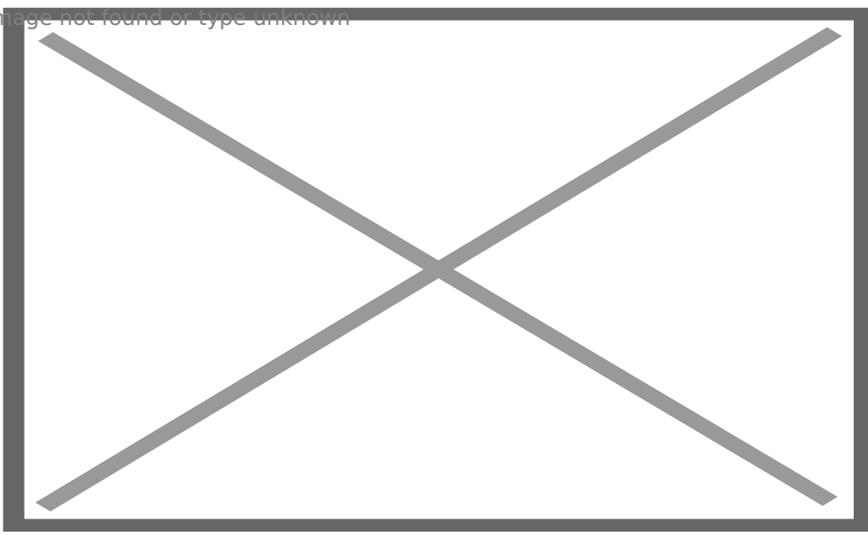


Image not found or type unknown

