

FBT Jolly 8B - Pasivni zvučnik

Šifra: 03724

Kategorija proizvoda: Pasivne Zvučne Kutije

Proizvođač: FBT

Cena: 22.500,00 rsd




Jolly 8B / 160W - 121DB SPL SOUND REINFORCEMENT MONITOR

Features

- 200mm (8") high efficiency and high excursion custom speaker
- 25mm (1") custom compression driver
- 90°H x 60°V constant directivity horn
- Polypropylene enclosure with integrated handle, 2 x M6 anchoring points, 25mm (1") pole mount socket
- Passive version, 160Wrms/8ohm recommended amplifier
- Internal passive crossover filter with "soft-trip" protection circuits on woofer and compression driver
- Linear frequency response over the entire dispersion angle
- NL-4 Neutrik™ Speakon input and link connectors

Image not found or type unknown

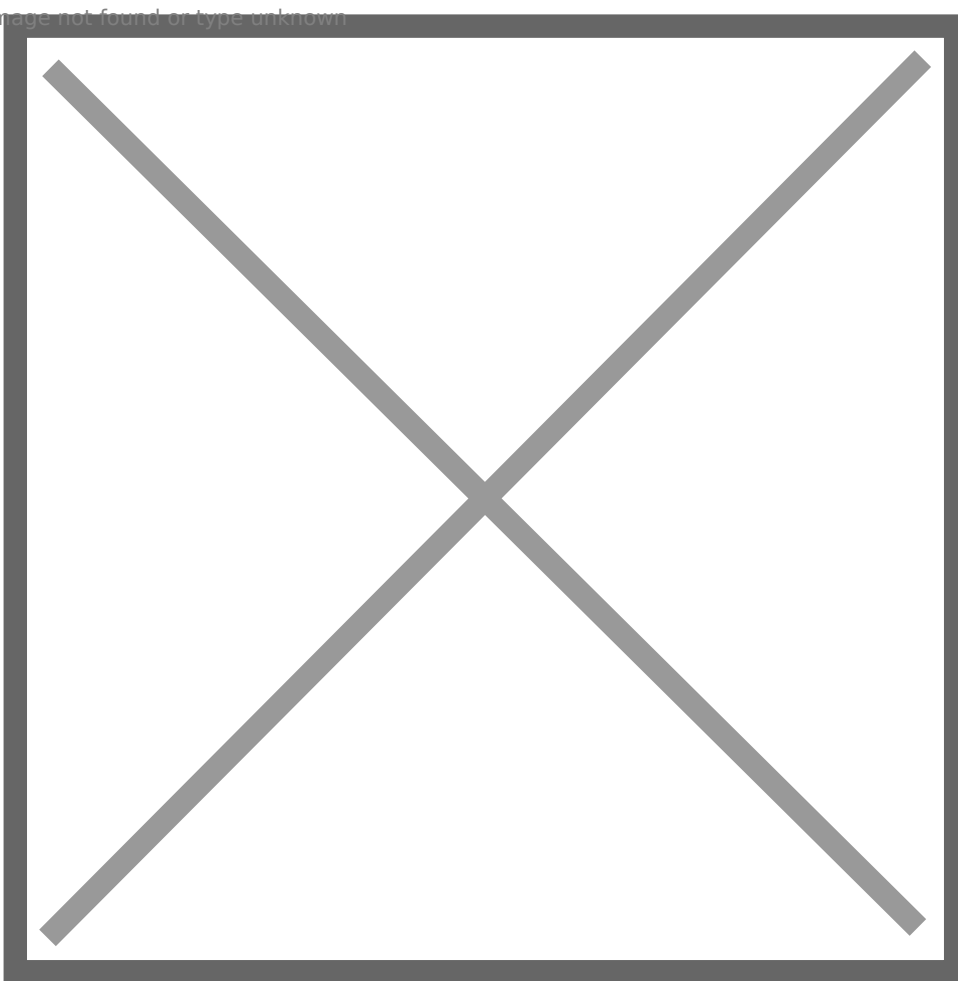

Hardware for permanent installations

Floor Monitor

[Download PDF drawing](#)

[Download datasheet](#)

[Download user manual](#)

| | | |
|------------------------------|--------|-------------------------|
| Configuration | way | 2 |
| Recommended amplifier | W rms | 160 |
| Short term power (IEC 268-5) | W | 320 |
| Nominal impedance | Ohm | 8 |
| Frequency response | @ -6dB | 70Hz - 20kHz |
| Low frequency woofer | inch | 1x8" - 1,5" Ø coil |
| High frequency driver | inch | 1x1" + horn - 1" Ø coil |
| Sensitivity (@1W/1m) | dB | 96 |
| Maximum SPL | dB | 118/121 |
| Dispersion | H x V | 90° x 60° |
| Crossover frequency | kHz | 3 kHz |
| Recommended HP filter | | 50Hz - 24dB oct |
| Recommended external filter | | ... |
| Input connectors | | 2 x speakon |
| Net dimensions (WxHxD) | mm | 255x415x245 |
| Net weight | kg | 5,8 |
| Shipping dimensions(WxHxD) | mm | 330x480x320 |
| Shipping weight | kg | 6,8 |