

logo not found or type unknown


Firma: Player Plus doo
Adresa: Svetogorska 9
Telefon: +381 11 3347 442
Fax: +381 11 3347 615
PIB: 106966344
E-mail: porudzbine@player.rs

INVISION iRock 5S
Image not found or type unknown

INVISION iRock 5S

Šifra: 04611
Kategorija proizvoda: Skeneri
Proizvođač: INVISION

Cena: 10.680,00 rsd

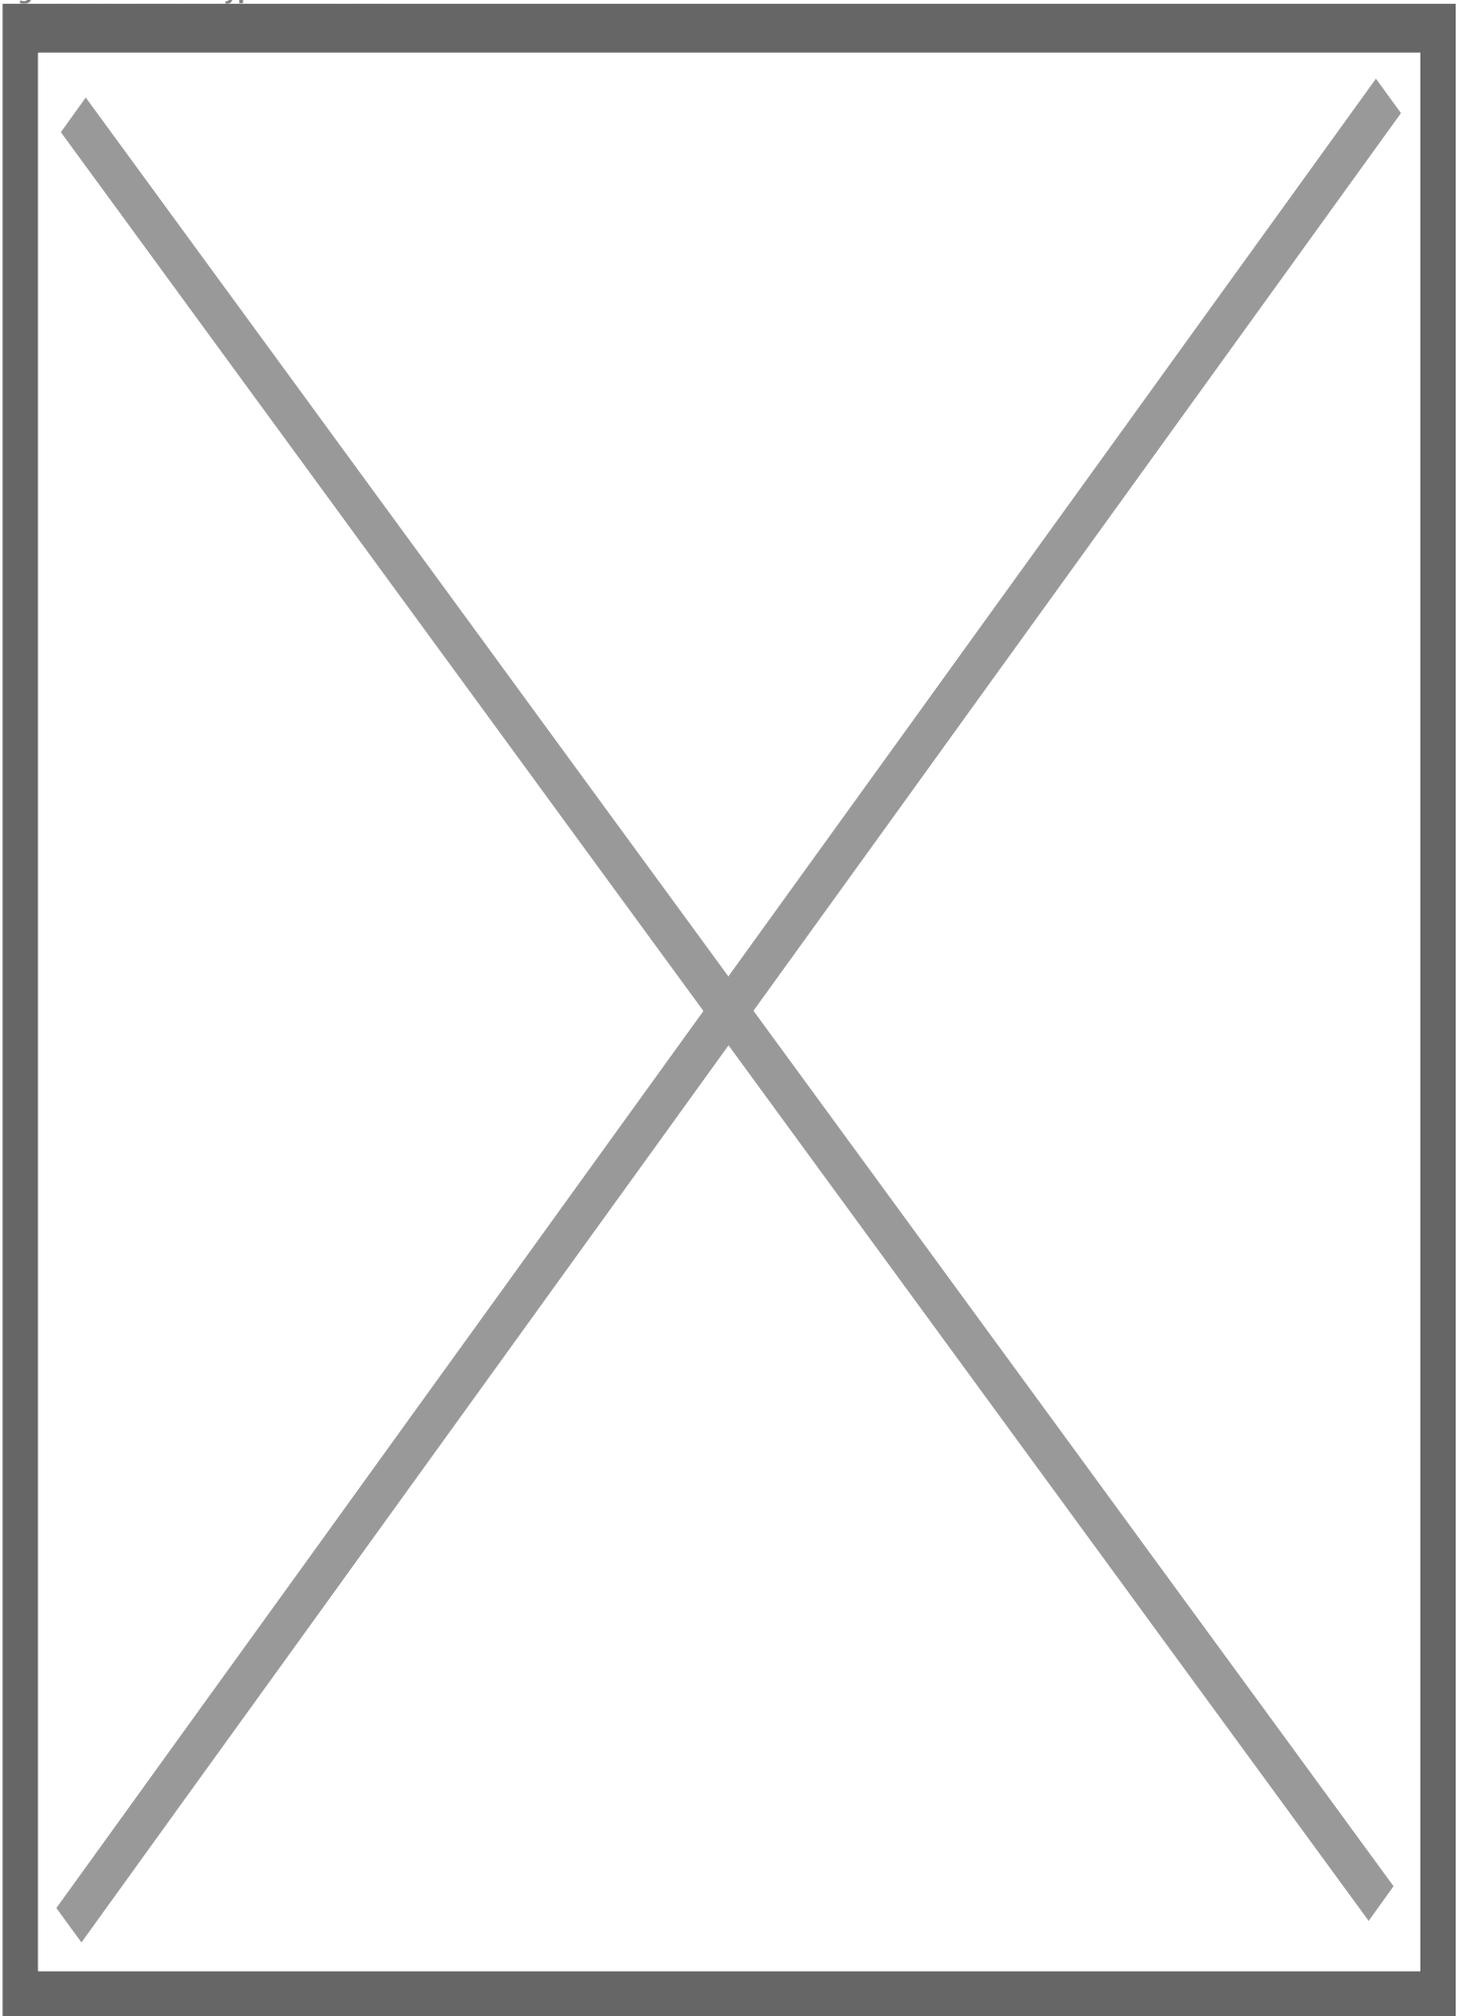

INVISION technology allows synchronisation of different types of intelligent fixtures via either a custom-built iLead DMX-512 controller or in stand-alone mode. iLead (Integrated Lighting System) allows fixtures to be linked and work in synchronisation, regardless of type, including iLead-equipped scanners, moving heads, and colour changers. The iLead controller can also remotely set the DMX addresses of the fixtures. All units are also controllable via any universal DMX-512 controller. Conversely, the iLead controller is a universal DMX-512 controller.

Features:

DMX-512 control channel: 5
Setting and addressing: 4 digit blue LED display
LED display with on/off setting function
Data in/out: Locking 3-pin XLR iSolution operation
Consistent DMX configuration enables iShow to be linked with iRock and iMove
DMX address can be set remotely by iLead controller.
No need to calculate the DMX channels of each fixture in the chain
When the DMX signal is off, the lights will switch to master/slave mode automatically
Easy installation, easy addressing, and pre-programmed function
Automatic switching between music trigger or auto trigger mode
Master/Slave mode
Built in dynamic lighting shows for instant operation
User friendly easy controller: Enjoy various lighting shows at your fingertips
Pan: 180 degrees; Tilt 70 degrees
Gobo wheel: 14 gobo's plus open blackout, including 1 replaceable gobo, 2 glass gobos, 1 effect gobo, and 10 metal gobo's.
Gobo shaking effect
Colour wheel - 11 trapezoid dichroic colours plus white; split colours available
Rainbow effect in both directions
Shutter Variable speed strobe, 1 - 10 flashes per second
High quality optical lens, dichroic colours and gobo's
Beam Angle: 14 degrees

Specification:

Power supply: 230v
Lamp: ELC 24v 250w
Replacement lamp: Lamp11
Dimensions: 695 x 340 x 250mm
Weight: 10.6kg