


## MARTIN RUSH MH 3 Beam B-Stock

Šifra: 08935  
Kategorija proizvoda: Roto Glave  
Proizvođač: Martin

**Cena: 251.880,00 rsd**

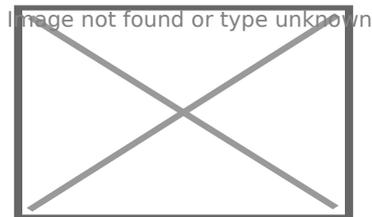

The RUSH MH 3 Beam is a powerful beam moving head that blasts an intense and narrow long-throw beam for spectacular mid-air looks and effects. It houses a fixed gobo wheel and color wheel with a multitude of effects possible from a dimmer and strobe, frost, zoom, 8-facet prism and focus.

- Powerful beam moving head
- Sharp, narrow long-throw beam
- Mid-air effects
- Fixed gobo wheel
- Color wheel
- Mechanical dimming and strobe
- Frost effect
- 8-facet prism
- Motorized focus
- Battery-powered display
- 3 & 5 pin XLR

Length: 418 mm (16.5 in.)
Width: 321 mm (12.6 in.)
Height: 489 mm (19.3 in.)
Weight: 20.5 kg (45.2 lbs.)
Approved lamp: Philips MSD Platinum 5R
Color temperature: 8000 K
CRI (Color rendering index): 75
Average lifetime: 2000 hours
Color wheel: 14 colors plus open, rotation with variable direction and speed

Static gobo wheel: 17 gobos plus open, wheel rotation and shake
Pre-programmed effects: 31 pan and tilt macros, adjustable speed
Shutter: Strobe effect, pulse effects, instant open and blackout
Prism: 8-facet, indexing and rotation with variable direction and speed
Frost: Fade in/out
Zoom: Motorized
Focus: Motorized
Dimmer: 0 - 100%, four dimming curve options
Pan: 540°
Tilt: 270°
Pan and tilt speed: Adjustable via onboard control panel and DMX
Control: DMX
DMX channels: 19
Setting and addressing: Control panel with LCD display
DMX compliance: USITT DMX512/1990
Beam angle: 1° - 3.8°
Color: Black
Housing: High-impact flame-retardant thermoplastic
Protection rating: IP20
Mounting points: Two quarter-turn brackets for rigging clamps
Location: Indoor use only, must be fastened to surface or structure
Orientation: Any
AC power input: Neutrik PowerCon
DMX data in/out: 3-pin and 5-pin locking XLR
AC power: 100-240 V nominal, 50/60 Hz
Typical total power consumption: 390 W
<i>Power consumption figures are typical, not maximum. Allow for +/-10% variation.</i>
Cooling: Forced air (temperature-regulated, low noise)
Maximum ambient temperature (Ta max.): 40° C (104° F)
Minimum ambient temperature (Ta min.): 0° C (32° F)
Power cable, 1.5 m (4.9 ft.), without mains plug
Mounting brackets

RUSH MH 3 Beam™ in cardboard box

© 2013 Martin Professional A/S. Specifications subject to change without notice