Firma: Player Plus doo
Adresa: Svetogorska 9
Telefon: +381 11 3347 442
Fax: +381 11 3347 615
PIB: 106966344
E-mail: porudzbine@player.rs


PR LIGHTING XR 200 BEAM - Roto glava



Šifra: 08989
Kategorija prozivoda: Roto Glave
Proizvođač: PR LIGHTING

Cena: 179.880,00 rsd

XR 200 BEAM
PR-2203
XR 200 BEAM equipped with Platinum 5R lamp, moving beam light with an unprecedented brightness usually achievable only with far greater wattages. Weighing just 16 kg, produces a perfectly parallel, laser-like beam with an incredible output of 67,765 lx at 20m. With its light weight and modest footprint, XR 200 BEAM is small enough to be fitted anywhere – on trusses at live and TV events, on stage, in showrooms or conference rooms.
Key Features:
PHILIPS MSD Platinum 5R (8,000K) (189W)
1 color wheel with 14 dichroic color filters
1 fixed gobo wheel with 17 interchangeable gobos + white
Beam Angle 0°□4°linearly adjustable
DMX 0-100% linearly adjustable focus
Double shutter blades, 0.3~20 F.P.S
1 Prism/Frost Wheel with 1 x CTO, 1 x frost, and 1 x 8-facet prism + white
Channels: Short Mode: 10, Standard Mode: 14
Pan 540º, Tilt 270º with auto position correction□speed adjustable, with lock mechanism.
Weight: 16Kg
IP20
Fixture usage time and software version display
Modular construction for easy maintenance
Standard Accessories:
G clamps, 2 pcs; XLR connectors, 1 set
Safety cord, 2 pc;
Optional Accessories: Ω clamps, 2 pcs

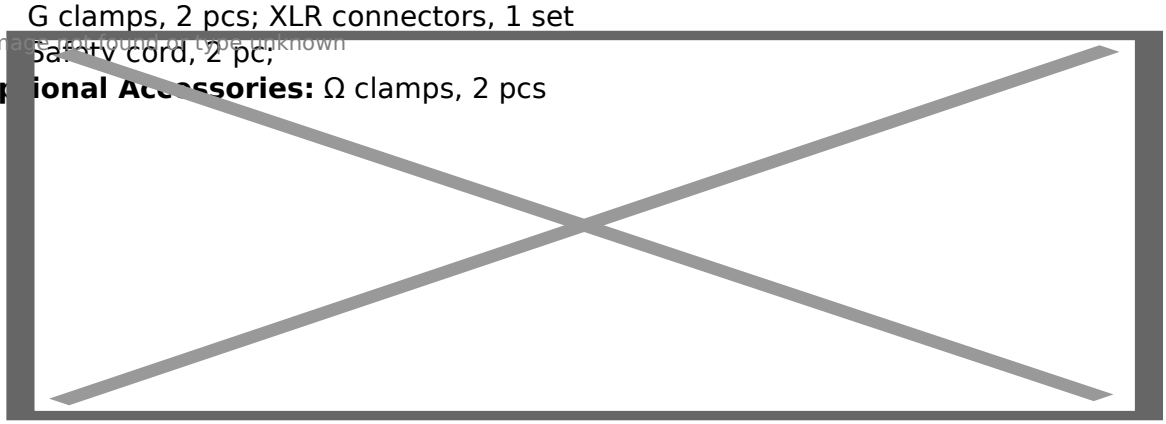

Technical Data:

Power Supply: 100V/200V/220V/230V/240V AC□50/60Hz
Power Consumption: 280W@220V
Light Source:
PHILIPS MSD Platinum 5R
(8,000K, 2,000hrs)

Colors:
1 Color Wheel
14 dichroic colour filters plus white
variable speed and bi-directional rainbow effect
linear colour changing is available

Gobos:
1 Fixed gobo wheel :
17 interchangeable gobos+ white
Shaking and bi-directional whee l scrolling at variable speeds
Gobo changing is available

Prism/Frost Wheel
8-facet rotating Prism(bi-directional with variable speeds)+CTO filter+ Frost Filter + White

Focusing
0-100% linearly adjustable by Dmx

Strobe:
Double shutter blades, 0.3~20 F.P.S

Head Movement:
Pan 540º, Tilt 270º with auto position correction

Beam Angle
0°□4°, Linear zoom

Control:
DMX512, 3 pin and 5 pin interfaces
10 channels in short mode, 14channels in standard mode
Self-test mode

Other Functions:
Adjustable Pan & Tilt speed
Fixture and lamp usage time display
Modular construction for easy maintenance
DMX512 wireless receiver (optional)
DMX512 wireless transmitter (optional)

Housing:
Composite plastic, IP20

Weight: 16Kg

Sizes: please see the drawings below

Light Output:

Image not found or type unknown


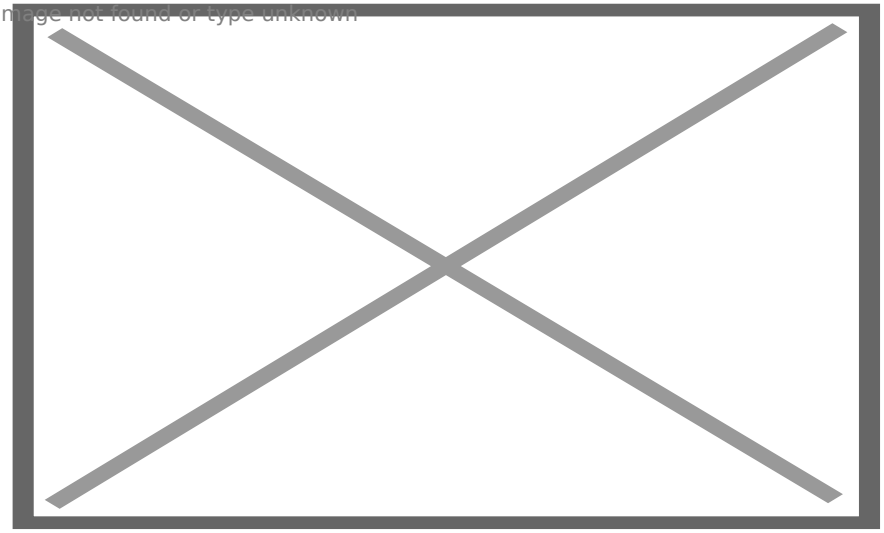


Image not found or type unknown



Cene su informativnog karaktera. Prodavac ne odgovara za tačnost cena iskazanih na sajtu, zadržava pravo izmena cena. Ponudu za ostale artikle, informacije o stanju lagera i aktuelnim cenama možete dobiti na upit. Plaćanje se isključivo vrši virmanski - bezgotovinski.